

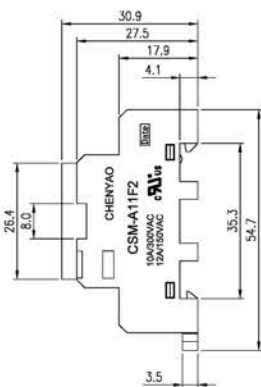
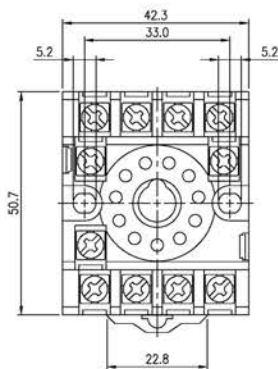


UL/CUL No: E306487

Dimensions



Accessories



Main Feature

- Snap-on mounting on DIN-rail.
- Screw mounting.
- Pozidrive screw with rising clamp terminals.
- Logical layout of input-/output connection.
- Metal clip with ejection function for relays of 50mm height.
- DIN-rail sockets and accessories: RoHS compliance (Directive 2002/95/EC).
- Socket with screw-type terminal for DIN-rail mounting.

Specifications

Rated current.....10A
Rated voltage / max. Switching voltage AC..150/300VAC
Dielectric strength coil-contact circuit.....2,000V_{rms}
Insulation resistance (at 50VDC).....1,000MΩ min.
Material group of insulation parts.....≥ IIIa

Insulation to IEC 60664-1

Type of insulation coil-contact circuit.....basic
Open contact circuit.....functional
Rated insulation voltage.....250V
Pollution degree.....2
Rated voltage system.....230/400V
Over voltage category.....III

RoHS Directive 2002/95/EC

Sockets, retainers and marking tag.....compliant
Degree of protection DIN 40050.....IP20
Ambient temperature range.....-25...+55°C
Terminals.....screw
Terminal screw torque acc. IEC 61984.....0.5Nm
Max.....0.7Nm

Wire cross section

Single wire.....2X2.5mm²
Fine wire.....2X2.5mm²
With bootlace crimp (DIN 46228/1).....2X1.5mm²
Insertion cycles.....A (10)
Max. Insertion Force total.....100N
Mounting distance.....0, dense packing
Weight.....53g
Packaging unit.....10 pcs.

Order Information

CSM - A 11 F2

Insulation levels	F1 (for one level) F2 (for two levels)
Relay terminals	08 (for 08 terminals relay) 11 (for 11 terminals relay)
Contact form	A (for stockade type) B (with finger protection)
Item	CSM