




EK381A

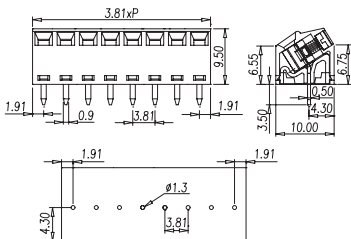

Pitch:3.81mm

Approval



Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	12A	12A
Conductor cross-section, solid (AWG/mm ²)	30~16	0.5~1.5
Conductor cross-section, flexible (AWG/mm ²)	30~16	0.5~1.5
Rated impulse voltage	2.5KV	
Torque(N-m)	0.20	
Screw	M2	
Wire strip length	6~7mm	
Pole	Cat.No.	
02	EK381A-02P	
:	:	
:	:	
24	EK381A-24P	