




EK500BD

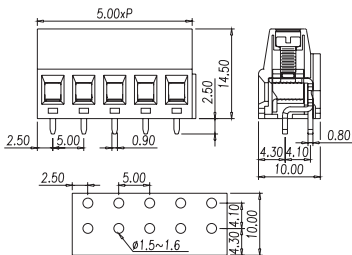

Pitch:5.00mm

Approval



Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	20A	12A
Conductor cross-section, solid (AWG/mm ²)	24~12	0.5~2.5
Conductor cross-section, flexible (AWG/mm ²)	24~12	0.5~2.5
Rated impulse voltage	4KV	
Torque(N-m)	0.50	
Screw	M2.5	
Wire strip length	6~7mm	
Pole	Cat.No.	
02	EK500BD-02P	
:	:	
:	:	
16	EK500BD-16P	